

TECHNICAL INFO

These glass products are used as thermal insulation on tubing for personal protection and gasketing for applications up to 1,000° F. The heavy wall construction provides greater insulating value and better hot splash protection.



They are also 100% texturized fiberglass and offer both abrasion and chemical resistance.

Specifications

ROPE: Low density and High density – braided
From 1/8" diameter to 1-1/2" diameter

TUBING: Wall thickness – 1/16"
Inside diameter from 3/8" to 3"
100' rolls

TADPOLE TAPES: from 1" overall to 2-1/2" overall
Bulb diameters from 3/8" to 1"

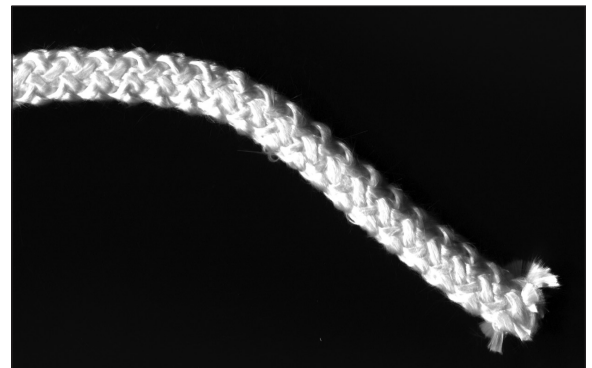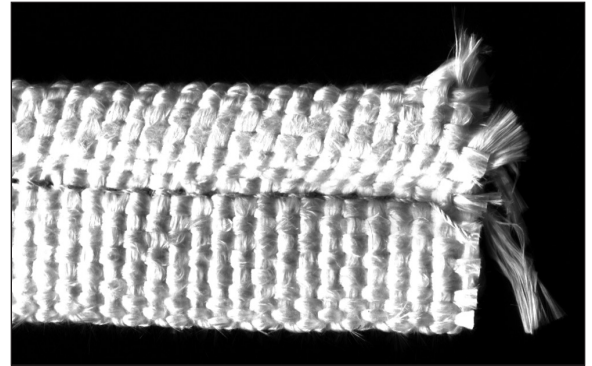

All statements herein are expressions of opinion which we believe to be accurate and reliable but are not intended as recommendations for their use in the infringement of any patent. No patent warranty of any kind, expressed or implied is made or intended.

For more information on GLT Products, please call toll-free at 800.874.1748 or online at www.gltproducts.com.



Innovative Insulation Systems

HEADQUARTERS:

6810 Cochran Road | Solon OH 44139 | 440.914.1122 | 440.914.1133 Fax | **1.800.874.1748**

DISTRIBUTION CENTERS:

Ohio: 6810 Cochran Road | Solon OH 44139 | 440.914.1122
North Carolina: 501 West Camel Street | Greensboro, NC 27401 | 1.800.551.9760
California: 4283 Pock Lane #200 | Stockton, CA 95206 | 1.800.833.4500
Texas: 8905 Market Street | Houston, TX 77029 | 1.800.874.1748