


1537CW

POLYPROPYLENE FACING TAPE

VentureTape® 1531CW is a tri-directionally reinforced white or black polypropylene film/ scrim/ kraft facing tape coated with a special cold weather acrylic pressure sensitive adhesive that combines quick stick at normal temperatures with superior low temperature performance. Designed for use as a vapor seal for Lamtec® WMP-VR faced insulation, VentureTape 1537CW has superior resistance to moisture and is also excellent for use in high humidity conditions.

Product Construction

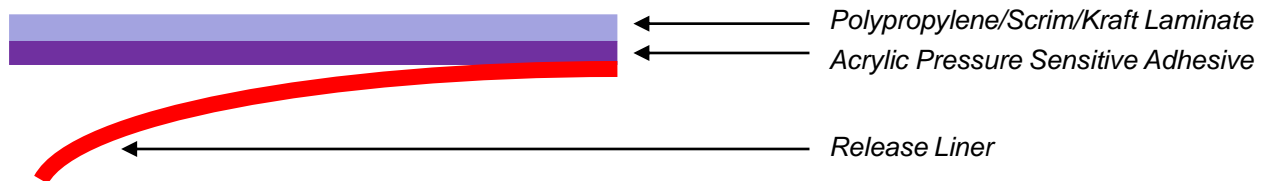

Features & Benefits

- High performance tape is specifically designed for use as a vapor seal on WMP-VR insulation products
- Bonds and seals extremely well at cold temperatures
- Acrylic adhesive performs well over a wide temperature range
- In stock product available for immediate delivery

Test	Typical Value	Typical Value (Metric)	Test Method
Product Thickness ^Ω	9.6 mils	0.24 mm	PSTC-133
Peel Adhesion ^Δ	45 oz/in	12.5 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	40 lb/in	180.8 N/25 mm	PSTC-131
Elongation	5 %	5 %	PSTC-131
Service Temperature	-40 to 240 °F	-40 to 116 °C	
WVTR	0.09 perm		ASTM E96

^Ω - excluding liner

^Δ - 20 minute dwell

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

Product Configurations

- Available in Black or White

Contact Venture Tape today for a complete list of products or a free sample

Toll Free North America 800-343-1076

From United Kingdom 0-800-962-957

From Australia 1-800-122-797

www.venturetape.com

VentureTape®

GTA - NHT, Inc.
Venture Tape
30 Commerce Rd., Rockland, MA 02370
Tel 781-331-5900; Fax 781-871-0065
800-343-1076 (U.S.A.), 800-544-1024 (Canada)
Toll Free Fax 877-264-5490
www.venturetape.com

GTA
TAPES & ADHESIVES
a 3M Company